



Optidrive Applications Support Library

Application Note	AN-ODE-2-015
Title	Modifying the V-F Output Characteristic
Related Products	Optidrive E2
Level 1	1 – Fundamental - No previous experience necessary 2 – Basic – Some Basic drives knowledge recommended 3 – Advanced – Some Basic drives knowledge required 4 – Expert – Good experience in topic of subject matter recommended

Overview

Optidrive E2 provides enhanced V/F (volts to Hertz) control for general purpose AC motor control applications.

In order to optimize the performance of the drive in all applications, parameters allow the V/F curve to be modified, allowing the user to increase or reduce the applied motor voltage as required to optimize the drive performance either with increased low speed torque for constant torque applications or optimal energy savings in variable torque applications. This is referred to as the V/F characteristic adjustment function.

In addition the motor startup / low speed voltage can be increased using the V/F voltage boost parameter to give improved starting / low speed torque performance. This is referred to as the V/F voltage boost function.



The V/F characteristic adjustment parameters are located in the extended Parameter menu. In order to access these control parameters, the user should set the correct access code in P-14. The default code is 101. The V/F voltage boost parameter is located in basic parameter menu and requires no security access.

V/F Voltage Boost Function

P - 11 V/F Voltage Boost

P-11 allows the user to directly adjust the voltage output applied to the motor at low speeds to improve starting and low speed performance.

P-11 defines the voltage applied to the motor at 0.0Hz, as a percentage of P-07, Motor Rated Voltage. If P-07 = 0, the voltage will be proportional to the incoming supply voltage. As the output frequency from the drive increases, the voltage boost is reduced linearly up to 50% of the motor rated frequency. This is shown clearly in the graph below.


P-11 is intended to allow the user to adjust the V/A (Volts to Amps) characteristic of the drive to compensate for the motor losses at low frequencies. If P-11 is too low, the motor may not develop sufficient output torque at low frequency. If P-11 is too high, the motor current will also be too high, and will likely result in the drive tripping O-I (Instantaneous Over-Current) or It.trp (Thermal Over-Current Trip). When adjusting P-11, it is advisable to check that the output current does not exceed the motor rated current when operating at low frequencies; otherwise P-11 should be reduced.

Example

For a typical 230V, 50Hz AC induction motor, the user should set P-07 (Motor Rated Voltage) = 230V and P-09 (Motor Rated Frequency) = 50Hz to give standard linear V/F operation.

If for any reason the user wishes to change this operation, e.g. to increase the voltage applied to the motor at lower speed Set P-11 to an increased value.

For example, if set to 20% the drive output will give the V/F characteristic indicated by the blue line in the graph below.

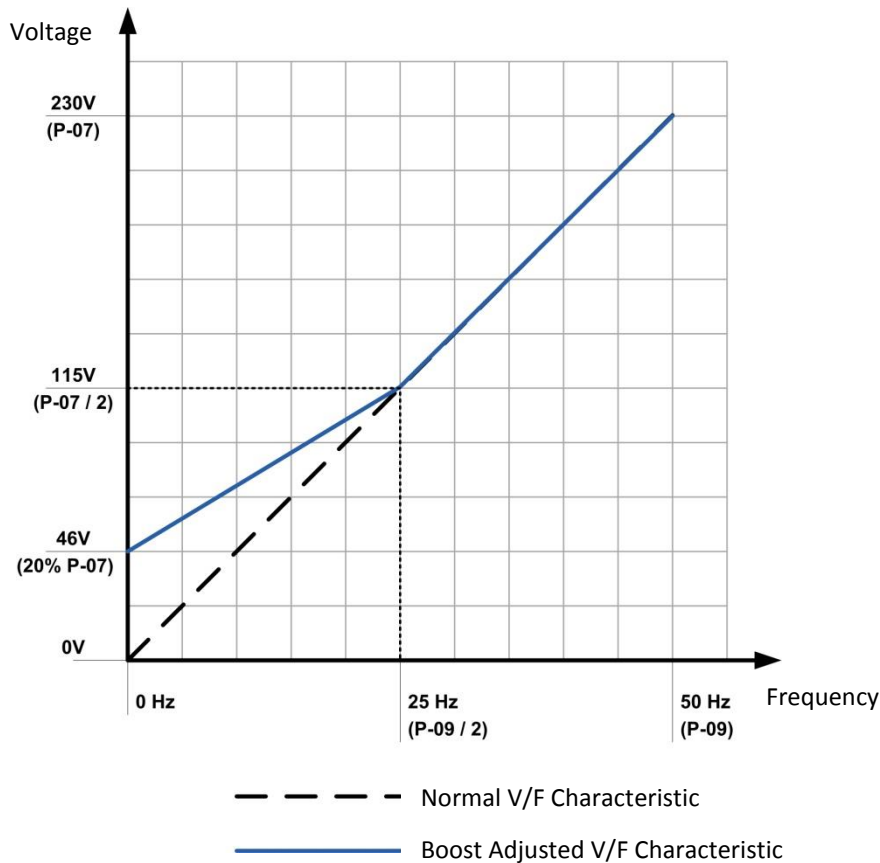

It is important to remember that increasing the motor voltage at any point will result in increased current and therefore increased heating of the motor, and so this function should be used with care. For applications where the motor may operate continuously at low speed, a force ventilated motor may be required.

V/F Characteristic Adjustment Function

The V/F characteristic adjustment function allows an additional set-point to be specified on the standard V/F output applied to the motor. For most applications, only two of these points are required, and the V/F characteristic operates as described in the section above. In some applications, it can be advantageous to define a further point, and the following parameters allow the user to directly adjust the voltage applied to the motor at a pre-defined frequency.

These parameters are located in the extended parameter menu and require a level 1 security code to be entered in P-14 (default = 101).

P-28 V/F characteristic adjustment voltage

This parameter specifies the voltage to be applied to the motor at the frequency specified in P-29. The range for this parameter is from 0 to P-07 (motor rated voltage). The default value for this parameter is 0.

P-29 V/F characteristic adjustment frequency


This parameter specifies the frequency at which the voltage (set by P-28) should be applied to the motor. The range for this parameter is from zero to motor base frequency, as defined in parameter P-09. See the graph below for further details. The default value for this parameter is 0 (setting to 0 disables this function).

Example

For a typical 230V, 50Hz AC induction motor, the user should set P-07 = 230V and P-09 = 50Hz to give standard linear V/F operation. In a centrifugal fan application, to provide the best possible energy savings, a parabolic V/F curve is desirable, reducing the voltage applied to the motor at low frequencies. This V/F curve can be approximated using the following technique.

- Set P-14 (access code) to 101 to permit access to extended parameter group.
- Set the V/F characteristic adjustment frequency (P-29) to 50% of P-09
(E.g. if P-09 = 50Hz, P-29 = 25Hz)
- Set the V/F characteristic adjustment voltage to 25% of P1-07
(E.g. if P-07 = 230 Volts, P-28 = 58 Volts)

The resultant characteristic will be as follows

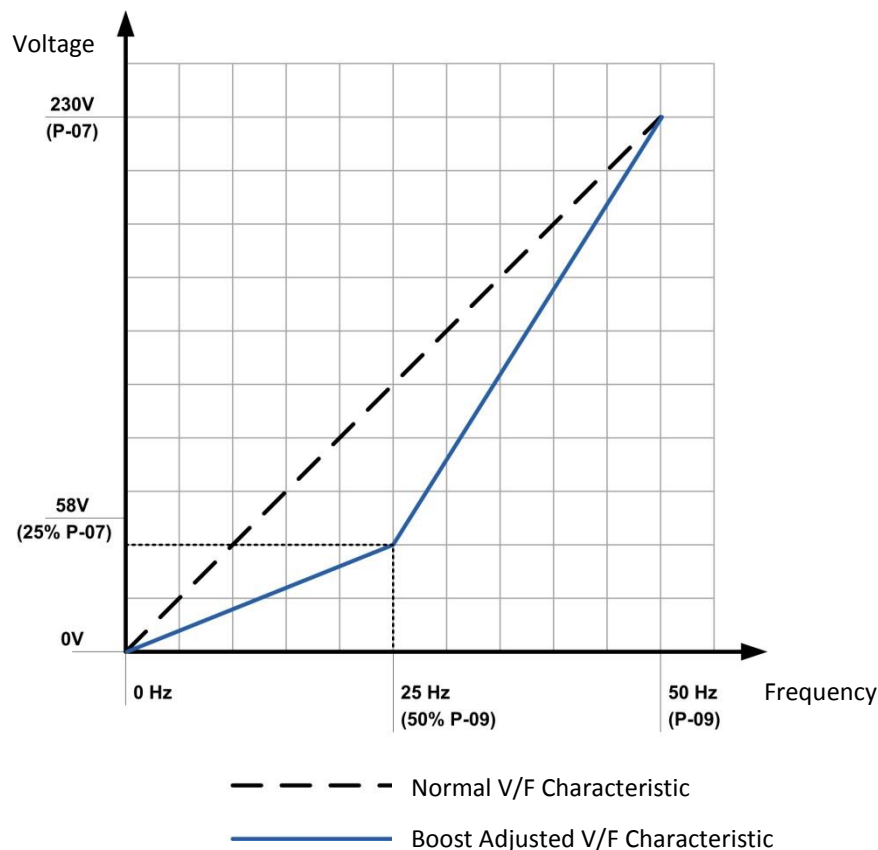

It is important to remember that increasing the motor voltage at any point will result in increased current and therefore increased heating of the motor, and so this function should be used with care. For applications where the motor may operate continuously at low speed, a force ventilated motor may be required.

Appendix

Revision History			
Version	Comments	Author	Date
01	Document Creation	JP	16/02/12
02	Revised to new format	KB	24/04/14